



HZ530 EMI Near-Field Probe Set up to 1GHz


Typical frequency response E-field probe

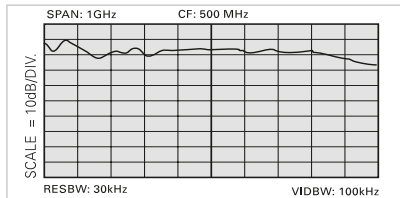

Typical frequency response H-field probe

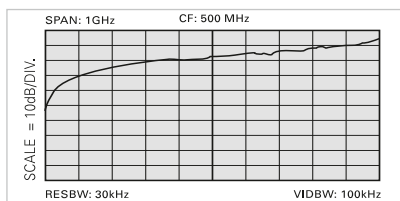

Typical frequency response high-impedance probe

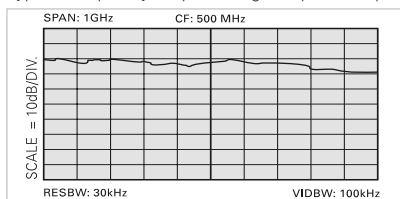

Technical specifications at 23°C ±2°C

Frequency Range:	100kHz...1GHz
Supply Voltage:	6V _{dc} from Spectrum Analyzer or batteries, 4 x Mignon/AA, not included
Supply Current:	approx. 10...24mA _{dc}
Probe Dimensions:	40 x 90 x 195mm (W x H x D)
Cases:	plastic, internal electrical shielding
Set includes:	1 E-field probe 1 H-field probe 1 high-impedance probe 1 BNC cable 1.5m 1 power cable Operating Manual Robust carrying case

The HZ530 Probe Set consists of three active broadband probes for EMI diagnosis. The probes are designed for connection to a HAMEG spectrum analyzer with input impedance of 50Ω. The probes can be powered by the spectrum analyzer or batteries. The slim format ensures easy access to the test object even in cramped test environments.

The H-field probe provides a signal to the spectrum analyzer that is proportional to the magnetic field strength. This makes it possible to localize sources of interference with relatively high precision.

The high-impedance probe can be used to determine interference levels on contacts, lines and printed circuit boards.

The E-field probe is the most sensitive of the three probes. It can be used to assess the total effect of shielding and filtering in a tested unit.